




Wireless Whiteboard Speaker

Model PI-30

1. 16-channel UHF selectability for wireless mic
 2. Red & green LED for visual confirmation of RF, audio signal
 3. Rugged steel grille for protection
 4. Three transducers with high-energy neodymium magnets, which are twice as efficient as conventional ferrite magnets for more power from a smaller, lighter speaker (easier to install)
 5. UHF on/off volume
 6. 1/4" mic in
 7. DC in
 8. Line in audio from whiteboards, LCD projectors, computers and other media players
 9. Tone control
 10. Volume on/off
 11. Duplicate line in, mic and DC functions allow the speaker to be hung from multiple angles and still operate unit
- Compatible with other Califone UHF microphones: wireless handheld (Q316), hands-free (M316 transmitter), wired mics

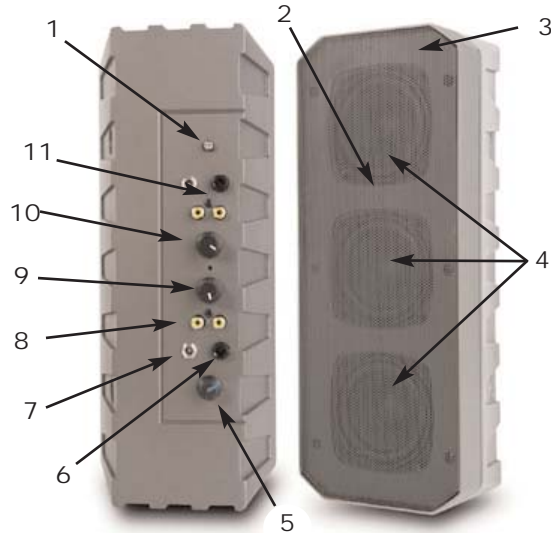

The Wireless Whiteboard Speakers will enhance any technology-related presentation with 16 selectable UHF channels. Their array technology targets a focused sound pattern directly at the audience instead of bouncing random and confusing sound off walls. It also projects a more evenly balanced sound so the front to the rear of the room hear the same volume.

"Project Intercept"

Please contact us immediately if you experience any difficulties with your PI30 speakers. Our "Project Intercept" customer service program will quickly repair or replace items under warranty. Simply contact us via phone or email warranty@califone.com

Visit our website at www.califone.com to learn more about the complete line of *Califone* audio enhancing and visual technology products including: Wired and Wireless public address systems and lecterns, wireless microphones, headphones & headsets, group listening centers, multimedia players and computer peripheral products.

We are proud of helping teachers enhance student understanding and achievements since 1947, with your satisfaction as our first priority.

The PI30 has a limited six-year warranty and service support available through authorized dealers nationwide. Its warranty covers school use - unlike some other PA products whose warranties would be voided if used in schools.

Distributed by:

Specifications

Amplifier	
Rated Power Output:	30 watts RMS, monaural
Sensitivity for Rated Output:	Line: 125 mVrms, mic: 4 mVrms Auxiliary: 250 mVrms
Frequency Response:	150 Hz - 15 kHz
Sensitivity	93 dB 1 Watt @ 1 meter
Impedance	6 Ohms
Speakers:	3 each 16 Ohm Transducers with high performance Neodymium Magnets
Inputs:	Line inputs (2): Hi-Z, RCA (summing L+R) Balanced mic: Hi or lo-Z, with phantom power (+15 volts D.C.) Unbalanced mic: Lo -Z, 1/4"-phone Auxiliary: Hi-Z Mono 1/4"-phone
Line Output:	250mv constant
Power Source:	Wall adapter with D.C. output to amp.
Dimensions (HWD), weight:	12.5" x 5" x 4.5", 3.2 pounds
Receiver Specifications	
Channels:	16 Selectable UHF
Frequency:	740 - 801.80MHz
Oscillation:	Phase Lock Loop, Synthesized
Modulation:	FM (Frequency Modulation)
Sensitivity:	7 microvolts
Frequency Response:	90 Hz - 17 KHz
Wireless Transmission Range:	Approximately 160 ft.
Dynamic Range:	100 dB
Material	ABS plastic with protective steel grille
Mounting Bracket Movement	Swivels horizontally or vertically depending on mounting position, heavy-duty 1018 steel, 1.7 lbs
Safety Approvals:	C-UL/CE approved safe for use in school, business, government and church facilities
Weight:	4.9 lbs each with bracket, ship 10 lbs.
Warranty	6 years from date of purchase
Available accessories	Belt-pack transmitter (M316) with choice of 3 hands free mics, hand-held wireless mic (Q316)

Califone International Inc. 800-722-0500
www.califone.com